

SECTION 001113 – ADVERTISEMENT FOR BIDS

City of Union 2024 Resurfacing Project Phase II

Sealed Bids will be received by the City of Union for the 2024 Roadway Resurfacing Project Phase II. The scope of work includes resurfacing and joint sealing multiple city-maintained streets in the City of Union as identified in the full work summary. Interested bidders can view the full notice and bid specs by requesting contract documents via email to: Nikki.hill@primeeng.com.

The City of Union (OWNER) reserves the right to waive any informalities or to reject any or all bids. This contract is considered a Lump Sum Contract. OWNER reserves the right to negotiate with the apparent successful bidder as necessary to meet the needs of OWNER.

Bids must be delivered to Attn: City Clerk, 1843 Bristow Drive Union, KY 41091, before **1:00 PM** prevailing local time on **Tuesday, April 30th, 2024**. Any bids received after this time will not be considered.



Description	Unit	Pembroke		Grafton		Easymoore		Holderness (Short)	
		Quantity		Quantity		Quantity		Quantity	
CL2 ASPH SURF 0.38D PG64-22*	TON	465		127		204		91	
ASPHALT MILLING AND TEXTURING*	TON	465		127		204		91	
JOINT SEAL (EDGE OF PAVEMENT)	LF	3600		1230		1460		740	
PAVE STRIPING-6 IN - YELLOW	LF								
PAVE STRIPING-6 IN - WHITE	LF	340							
PAVE MARKING-THERMO CURV ARROW	EACH								
PAVE MARKING-THERMO CURV-THRU ARROW	EACH								
PAVE MARKING-THERMO STOP BAR-24 IN	LF	24							
MILLING CONCRETE PAVMENT	SQYD								
ASPHALT SPEED TABLE	EACH	1							
LOOP DETECTOR REPLACEMENT	EACH								

City of Union Resurfacing Project Phase II
Pembroke, Grafton, Easymoore, and
Holderness (Short)
Resurfacing Overview

1000 ft


Description	Melody (Stamped Pavement)		Melody (Asphalt)	
	Unit	Quantity	Quantity	
CL2 ASPH SURF 0.38D PG64-22*	TON	21	388	
ASPHALT MILLING AND TEXTURING*	TON		388	
JOINT SEAL (EDGE OF PAVEMENT)	LF	100	2450	
PAVE STRIPING-6 IN - YELLOW	LF			
PAVE STRIPING-6 IN - WHITE	LF		540	
PAVE MARKING-THERMO CURV ARROW	EACH			
PAVE MARKING-THERMO CURV-THRU ARROW	EACH			
PAVE MARKING-THERMO STOP BAR-24 IN	LF		50	
MILLING CONCRETE PAVEMENT	SOYD	225		
ASPHALT SPEED TABLE	EACH			
LOOP DETECTOR REPLACEMENT	EACH		2	

Mill stamped pavement at Melody and Sonata and replace with asphalt surface.

City of Union Resurfacing Project Phase II
Melody Drive
Resurfacing Overview



600 ft

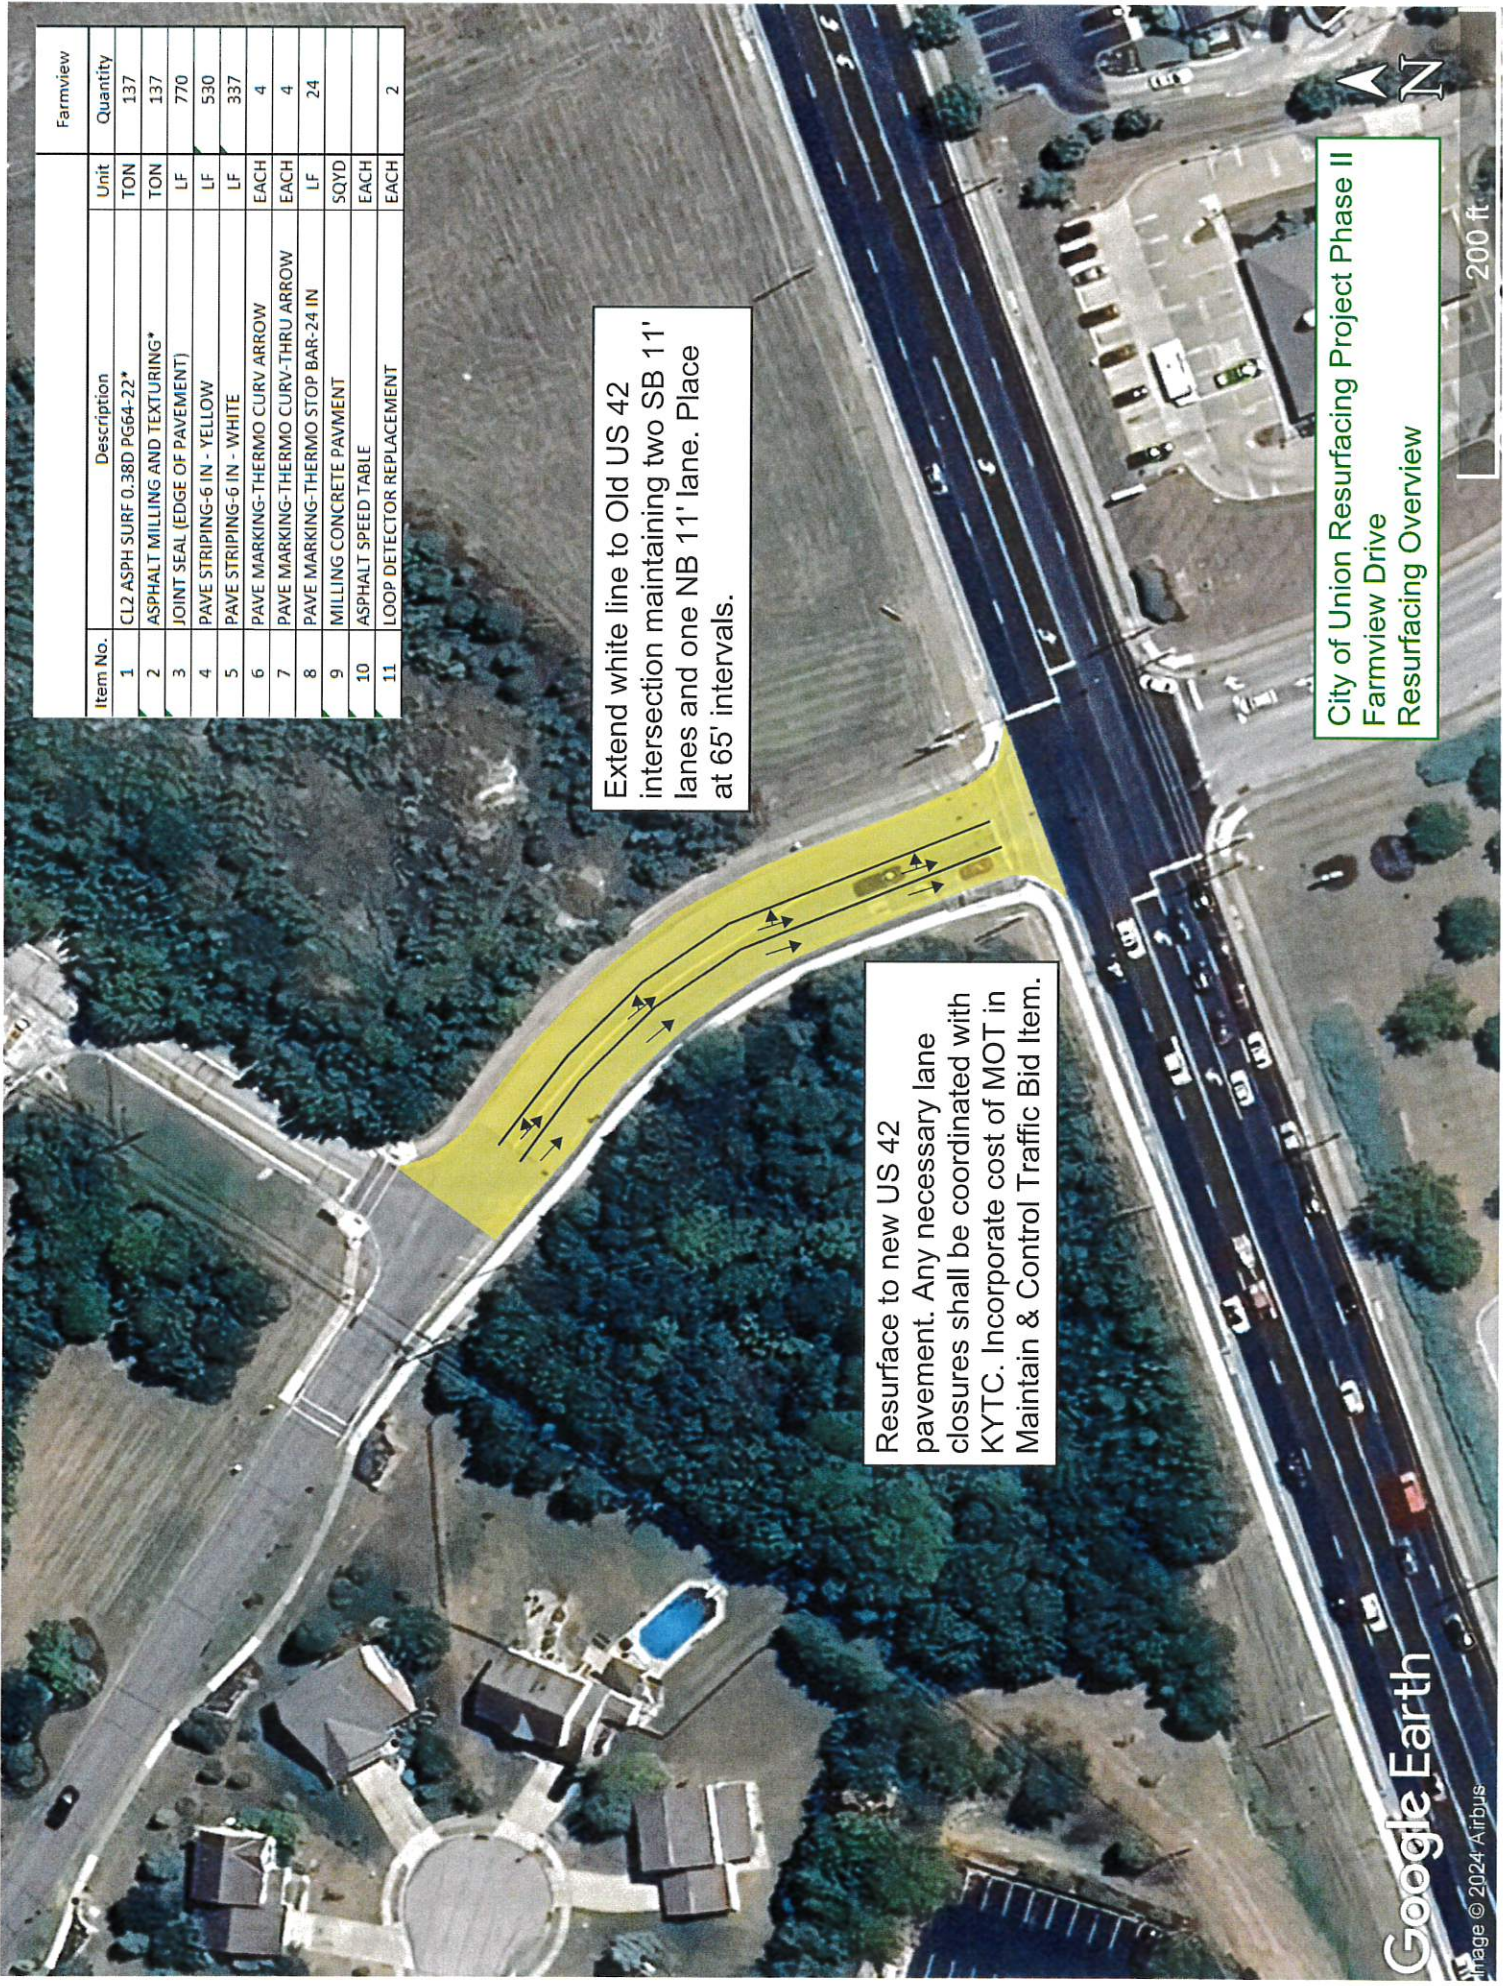

Item No.	Description	Unit	Farmview Quantity
1	CL2 ASPH SURF 0.38D PG64-22*	TON	137
2	ASPHALT MILLING AND TEXTURING*	TON	137
3	JOINT SEAL (EDGE OF PAVEMENT)	LF	770
4	PAVE STRIPING-6 IN - YELLOW	LF	530
5	PAVE STRIPING-6 IN - WHITE	LF	337
6	PAVE MARKING-THERMO CURV ARROW	EACH	4
7	PAVE MARKING-THERMO CURV-THRU ARROW	EACH	4
8	PAVE MARKING-THERMO STOP BAR-24 IN	LF	24
9	MILLING CONCRETE PAVMENT	SQYD	
10	ASPHALT SPEED TABLE	EACH	
11	LOOP DETECTOR REPLACEMENT	EACH	2

Extend white line to Old US 42 intersection maintaining two SB 11' lanes and one NB 11' lane. Place at 65' intervals.

Resurface to new US 42 pavement. Any necessary lane closures shall be coordinated with KYTC. Incorporate cost of MOT in Maintain & Control Traffic Bid Item.

City of Union Resurfacing Project Phase II
Farmview Drive
Resurfacing Overview

200 ft

Google Earth

Image © 2024 Airbus